
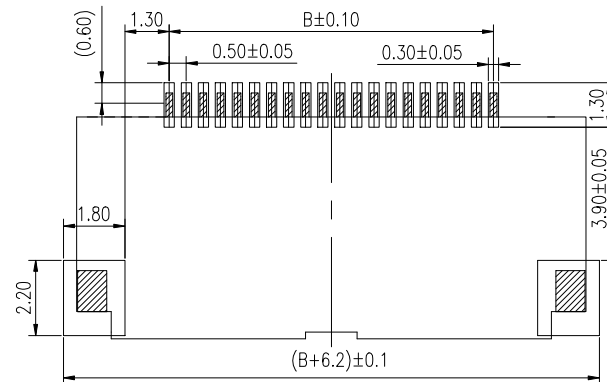





REV	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			NEW DRAWING		

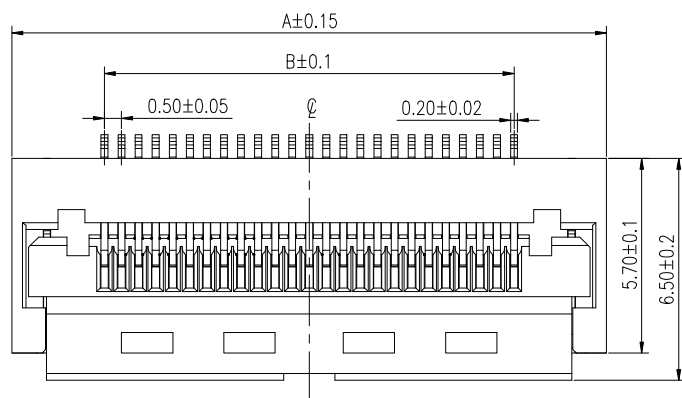


NOTES:

- 1.HUOSING: LCP HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BLACK
- 2.ACTUATOR: LCP HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BLACK
- 3.TERMINAL:PHOSPHOR BRONZE
PLATING:1μ" GOLD FLASH OR 100~150μ" TIN(LEAD FREE)
OVERALL 50~100μ" NICKEL UNDER PLATED.
- 4.FITTING NAIL:BRASS
PLATING:100~150μ" TIN(LEAD FREE)
- 5.RATING: OVERALL 50~100μ" NICKEL UNDER PLATED.
OPERATING VOLTAGE:50V AC,DC
CURRENT RATING:0.5A AC,DC
OPERATING TEMPERATURE:-25°C~+85°C


RECOMMENDED PCB PATTERN DIM.
TOLERANCE : ±0.05

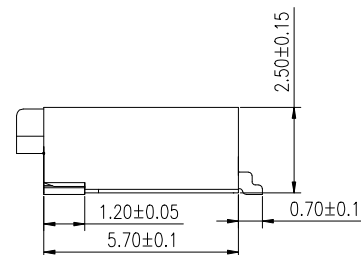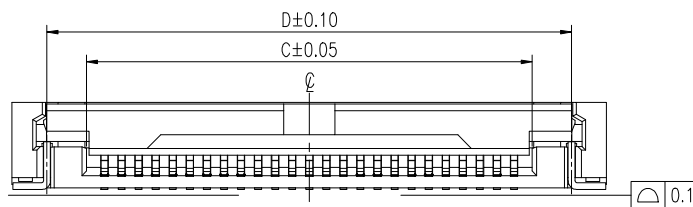

CABLE INSERT DIM.

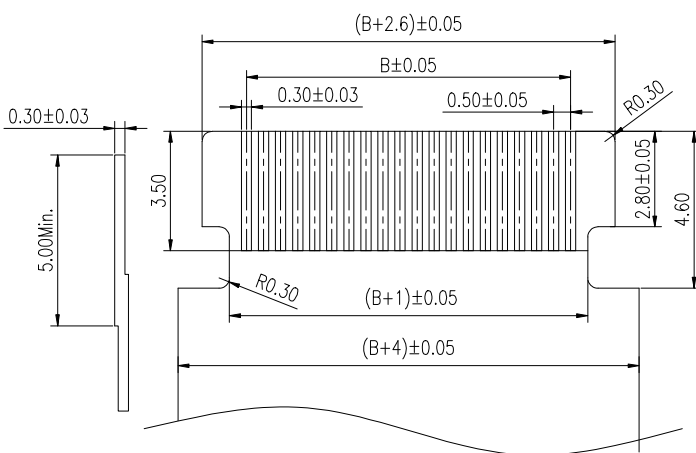

APPLICABLE FPC/FFC

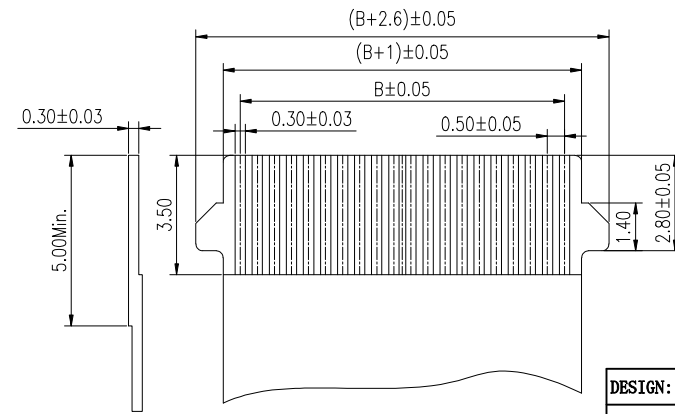

APPLICABLE FPC/FFC

NO.of contacts	Dimensions				NO.of contacts	Dimensions			
	A.	B.	C.	D.		A.	B.	C.	D.
4	6.92	1.50	2.63	4.87	34	21.92	16.50	17.63	19.87
5	7.42	2.00	3.13	5.37	35	22.42	17.00	18.13	20.37
6	7.92	2.50	3.63	5.87	36	22.92	17.50	18.63	20.87
7	8.42	3.00	4.13	6.37	38	23.92	18.50	19.63	21.87
8	8.92	3.50	4.63	6.87	40	24.92	19.50	20.63	22.87
9	9.42	4.00	5.13	7.37	41	25.42	20.00	21.13	23.37
10	9.92	4.50	5.63	7.87	42	25.92	20.50	21.63	23.87
11	10.42	5.00	6.13	8.37	45	27.42	22.00	23.13	25.37
12	10.92	5.50	6.63	8.87	46	27.92	22.50	23.63	25.87
13	11.42	6.00	7.13	9.37	48	28.92	23.50	24.63	26.87
14	11.92	6.50	7.63	9.87	49	29.42	24.00	25.13	27.37
15	12.42	7.00	8.13	10.37	50	29.92	24.50	25.63	27.87
16	12.92	7.50	8.63	10.87	51	30.42	25.00	26.13	28.37
17	13.42	8.00	9.13	11.37	52	30.92	25.50	26.63	28.87
18	13.92	8.50	9.63	11.87	53	31.42	26.00	27.13	29.37
19	14.42	9.00	10.13	12.37	54	31.92	26.50	27.63	29.87
20	14.92	9.50	10.63	12.87	55	32.42	27.00	28.13	30.37
21	15.42	10.00	11.13	13.37	56	32.92	27.50	28.63	30.87
22	15.92	10.50	11.63	13.87	57	33.42	28.00	29.13	31.37
23	16.42	11.00	12.13	14.37	58	33.92	28.50	29.63	31.87
24	16.92	11.50	12.63	14.87	59	34.42	29.00	30.13	32.37
25	17.42	12.00	13.13	15.37	60	34.92	29.50	30.63	32.87
26	17.92	12.50	13.63	15.87	61	35.42	30.00	31.13	33.37
27	18.42	13.00	14.13	16.37	62	35.92	30.50	31.63	33.87
28	18.92	13.50	14.63	16.87	63	36.42	31.00	32.13	34.37
29	19.42	14.00	15.13	17.37	64	36.92	31.50	32.63	34.87
30	19.92	14.50	15.63	17.87	65	37.42	32.00	33.13	35.37
31	20.42	15.00	16.13	18.37	66	37.92	32.50	33.63	35.87
32	20.92	15.50	16.63	18.87	68	38.92	33.50	34.63	36.87

DESIGN:	Xiping Huang				广东国连电子有限公司				
CHECK:	Ke Tian				GUANGDONG GUOLIAN ELECTRONICS CO., LTD				
APPROVED:	Youquan Xu			TITLE:					
DIM	TOL	DIM	TOL	0.5 PITCH 2.5H FPC SMT CONN.					
X.	±0.25	X°	±3.0°	PART NO.					
X. X	±0.20	X. X°		0525A-xxCL-GF					
X. XX	±0.15	X. XX°		REV. A					
X. XXX		X. XXX°							SCALE: N/A
				UNIT:		SHEET:			
				mm		1/1			