


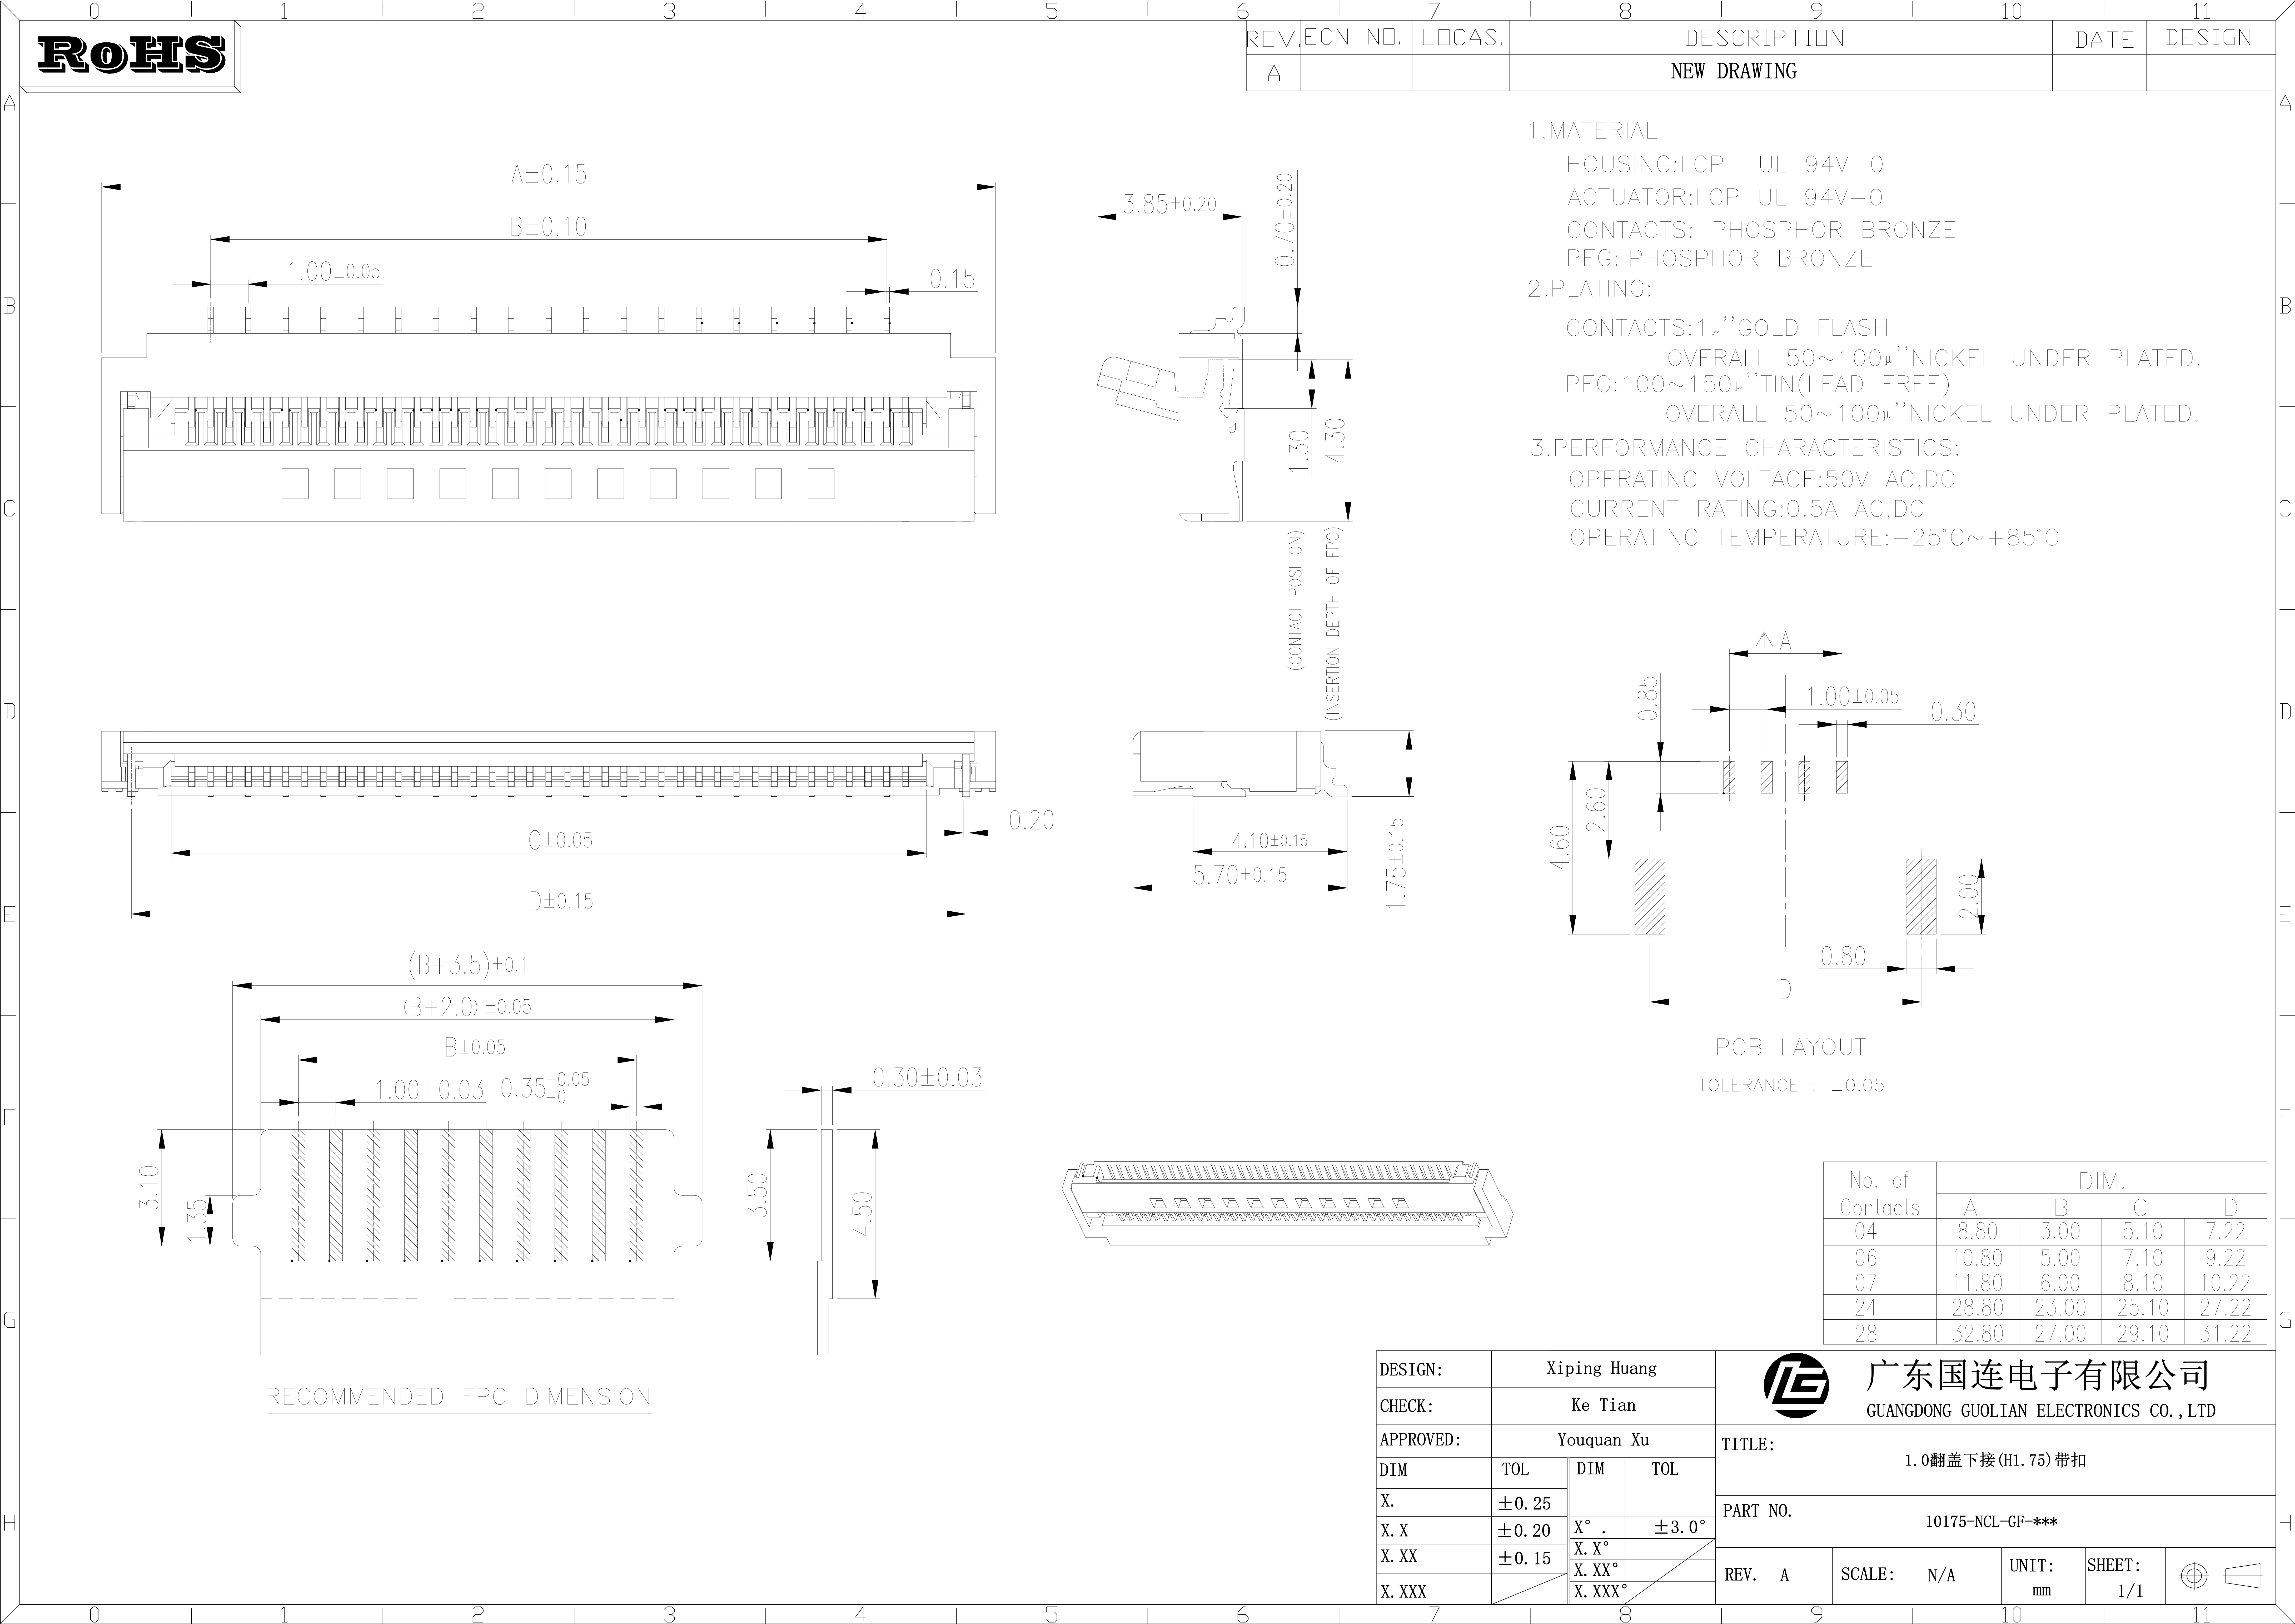


ROLLS

REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			NEW DRAWING		

1.MATERIAL
HOUSING:LCP UL 94V-0
ACTUATOR:LCP UL 94V-0
CONTACTS: PHOSPHOR BRONZE
PEG: PHOSPHOR BRONZE
2.PLATING:
CONTACTS:1μ”GOLD FLASH
OVERALL 50~100μ”NICKEL UNDER PLATED.
PEG:100~150μ”TIN(LEAD FREE)
OVERALL 50~100μ”NICKEL UNDER PLATED.
3.PERFORMANCE CHARACTERISTICS:
OPERATING VOLTAGE:50V AC,DC
CURRENT RATING:0.5A AC,DC
OPERATING TEMPERATURE:-25℃~+85℃

PCB LAYOUT
TOLERANCE : ±0.05

No. of Contacts	DIM.			
	A	B	C	D
04	8.80	3.00	5.10	7.22
06	10.80	5.00	7.10	9.22
07	11.80	6.00	8.10	10.22
24	28.80	23.00	25.10	27.22
28	32.80	27.00	29.10	31.22

DESIGN:		Xiping Huang			广东国连电子有限公司 GUANGDONG GUOLIAN ELECTRONICS CO.,LTD					
CHECK:		Ke Tian								
APPROVED:		Youquan Xu		TITLE: 1.0翻盖下接 (H1.75) 带扣						
DIM	TOL	DIM	TOL							
X.	±0.25			PART NO. 10175-NCL-GF-***						
X. X	±0.20						X° .	±3.0°		
X. XX	±0.15			X. X°		REV. A	SCALE: N/A	UNIT: mm	SHEET: 1/1	
X. XXX				X. XX°						
		X. XXX°								